6H SERIES



DEPENDABLE POWER

Constant Speed

260 HP (194 kW) @ 1800 rpm

- Variable Speed
- **9** 282 HP (210 kW) @ 1900 rpm




ENGINE SPECIFICATIONS

6 H K 1


Displacement	7.8L (475.9 cu in)
Cylinders	6
Cycle	4
Turbo Charger or Charged Air Cooled	Turbo and Charge Air Cooled
Electrical System	Electric self-priming fuel lift pump
Max Torque	1080 Nm (796.5 lb ft) @ 1500 rpm
5 Year / 5000 Hour Limited Warranty*	Yes
Cooled EGR	Yes
SAE Housing Options	SAE 2 flywheel housing
Gear Case PTO	Optional
Glow Plug Starting Aid	Yes
Aftertreatment	DOC + SCR

*See your authorized Isuzu representative for warranty details.

ENGINE PERFORMANCE CURVES

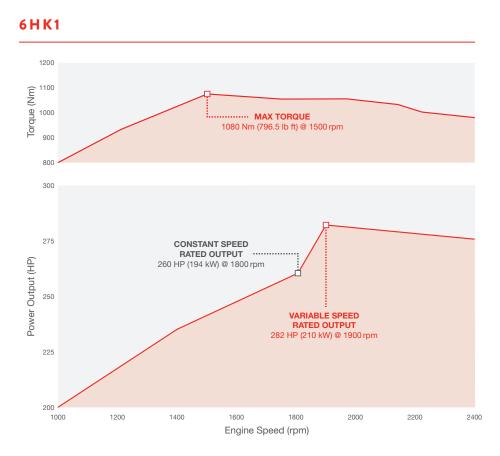



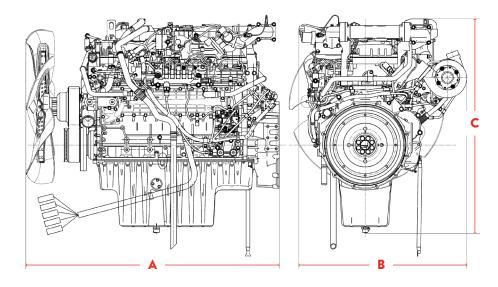

ENGINE DIMENSIONS

A – Length B – Width C - Height Dry Weight

APPLICATIONS



Agricultural















Isuzu Motors America, LLC 46401 Commerce Center Drive Plymouth, Michigan 48170 Phone: 734.582.9470 isuzuengines.com

Forest Machinery

Irrigation



Water Pump

Hydraulic Pump

General

EU | Stage V¹

US | EPA – TIER 4

STANDARD FEATURES

• Emission Control Device, maintenance free

CERTIFICATIONS

- Flywheel housings: SAE #2
- DOC & SCR
- · Other emission-reducing features, including Cooled EGR and Wastegate Turbocharger
- · High pressure Common Rail and Direct Injection
- Electric self-priming fuel lift pump
- · Glow plug starting aid
- · Dry/replaceable cylinder liners
- 5-year / 5,000-hour warranty²
- 500-hour oil drain & service interval

AVAILABLE OPTIONS

- Side or bottom drain oil pan
- SAE B Gear Case PTO
- · Cooling packages
- Air cleaners
- · Meter board and wire harness
- Engine mounting
- · Weather and sound-proofing enclosure
- DEF System

POWER UNITS AVAILABLE

- Standard
- Custom
- Pre-Validated Open GenSet-Ready³



- ¹ See your authorized Isuzu representative for certified configurations.
- ² See your authorized Isuzu representative for warranty details
- ³ Pre-qualifications can be up to 100% depending on selected configuration. See your authorized Isuzu representative for qualification details.

ILS-6HK1X-023-1



53.1" (1348.9mm)

6 H K 1

31.1" (790.5 mm)

42.3" (1074.3 mm)

530 kg (1168.5 lbs)