Isuzu Diesel Engines



4LE2

Generator: 32 HP @ 1800 RPM

Standard features:

- U.S. EPA Tier 4 Interim
- Displacement: 2.2 L
- Naturally aspirated
- Fuel consumption:.384 LB/HP-HR
- Flywheel housing: SAE 5
- Electric & self-priming fuel lift pump
- 12V and 24V available
- Glow plug starting aid
- High angularity oil pan
- 500-hour service intervals
- 5-year / 5,000-hour warranty

The power behind it all.



Isuzu Diesel Engines

4LE2

Generator: 32 HP @ 1800 RPM

Standard features:

- U.S. EPA Tier 4 Interim
- Displacement: 2.2 L
- Naturally aspirated
- Fuel consumption: .384 LB/HP-HR
- Flywheel housing: SAE 5
- Electric & self-priming fuel lift pump
- 12V and 24V available
- Glow plug starting aid
- High angularity oil pan
- 500-hour service intervals
- 5-year / 5,000-hour warranty

The power behind it all.







- Fuel consumption: .384 LB/HP-HR
- 12V and 24V available
- 5-year / 5,000-hour warranty


The power behind it all.



4LE2 Genset Performance Curves:

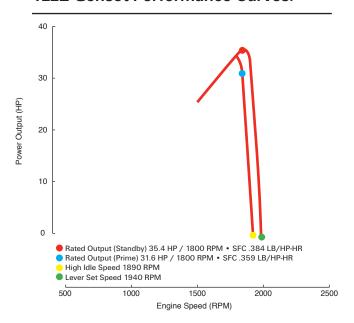





Available options:

- Cooling system
- Air cleaner
- Exhaust system
- Front and rear mounts
- Skid base
- Instrument panel & extension harness
- Custom power unit

Horsepower comparison:

| Engine Model | Cylinders | Displacement (L) | HP Range |
|--------------|-----------|------------------|----------|
| 3CE1 | 3 | 1.6 | 20-24 |
| 4LE2 | 4 | 2.2 | 30-36 |
| 4LE1T | 4 | 2.2 | 40-48 |

For additional information, please contact your local distributor or visit www.isuzuengines.com

Isuzu Motors America, LLC

46401 Commerce Center Drive Plymouth, Michigan 48170 Phone: 734.582.9470

Fax: 734.455.7581